OLIVEHURST PUBLIC UTILITY DISTRICT

NOTICE OF REQUEST FOR SEALED BID'S

(DATE) NOVEMBER 20, 2026

OWNER: **Olivehurst Public Utility District**

PROJECT: **OPUD MATERIAL PURCHASE FOR PARKS PICNIC TABLES, BENCHES, & RECEPTALES WITH TRASH CANS.**

TO: Contractor / Bidder

BID DUE DATE: **December 11, 2026 2:00 P.M.**

BID OPENING DATE/TIME: December 11, 2026 Shortly after Bid Due Date.

SUBMIT BID TO: **Olivehurst Public Utility District**
1970 9th Avenue
Olivehurst, CA 95961
(530) 682-0736

Notice is hereby given to all prospective Contractors /Suppliers to **submit a sealed BID** on or before the above date. Contractor / Supplier agree to supply all equipment described in the available CONTRACT DOCUMENTS consisting of Plans, proposal document and Specifications. OPUD is looking for BIDS for the purchase of Picnic Tables, Benches, and Receptacle material. Copies of the CONTRACT DOCUMENTS may be obtained from Olivehurst Public Utility District, upon the non-refundable payment of $ 50 per set, or you may request a free electronic copy from the District Public Works Manager via email at sboyal@opud.org.

Any question should be submitted to the Public Works manager via email at sboyal@opud.org or via phone at 530-682-0736.

Sincerely,

Swarnjit Boyal

Swarnjit Boyal, MS
Public Works Manager

OLIVEHURST PUBLIC UTILITY DISTRICT

Our mission is to provide high quality services to enhance our community's quality of life.

BOARD OF DIRECTORS
Dennise Burbank Lacey Nelson John Floe Mary Jane Griego Marc Perrault

GENERAL MANAGER
John Tillotson

November 20st, 2026

To: Prospective Bidders

RE: OPUD Material Purchase of Park Picnic Tables, Benches, and Receptacles with trash cans.

Bids shall include any and all taxes, freight, federal/state fees, hazardous waste disposal fee, weight certificate of completed unit, etc. and be an 'Out-The-Door' cost. Please make sure to include a specification page/build sheet of furniture in order to verify compliance with the requested specifications above. Any questions shall be directed to the OPUD Public Works Department at 530-682-0736 or via email at sboyal@opud.org. Attached please find an example of what OPUD is looking for (or similar). Item # & MFG# was used as sample from local vendor as reference only. ***For any other item not mentioned or desire for a similar alternative, please reach out to confirm if it meets OPUD requirements.***
Olivehurst Public Utility District will be accepting as specified below:

PO Box 670
Olivehurst, CA 95961
Phone (530) 682-0736

Bid FORM for **following Park's outdoor furniture:**


BID SHEET FOR OPUD PARK'S PICNIC TABLES, BENCHES, & RECEPTACLES WITH TRASH CANS - BID FORM									
Item Number	Title	Item finish	MFG #	Sealer	Color	Unit of Measure	Quantity	Price	TOTAL
1	84in Table w/FS legs	Smooth Finish	100FSS84 or similar/approved equal to	Acrylic Sealer	Increte Cocoa	EA	4		
2	84in Table w/FS legs left entry	Smooth Finish	100FSS84 LE or similar/approve equal to	Acrylic Sealer	Increte Cocoa	EA	2		
3	72in Smooth Top Picnic Table FS legs	Smooth Finish	100FSS or similar/approve equal to	Acrylic Sealer	Increte Cocoa	EA	2		
4	26in x 84in Contour Bench with center armrest	Smooth Finish	408B or similar/approve equal to	Acrylic Sealer	Increte Cocoa	EA	17		
5	45G Waste Receptacle Side opening-	Smooth Finish	506 - 45G Waste or similar/approve equal to	Acrylic Sealer	Increte Cocoa	EA	2		
6	506 DOOR W/HANDLE BRONZE (GR1372-BR340)	Smooth Finish	506 DOOR HAN BRONZE or similar/approve equal to		bronze metal	EA	2		
7	23G Waste receptacle side opening with liner	Smooth Finish	504 23G Side Opening or similar/approve equal to	Acrylic Sealer	Increte Cocoa	EA	2		
8	504 DOOR W/HANDLE BRONZE (GR1372-BR340)	Smooth Finish	504 DR HANDLE BRONZE or similar/approve equal to		bronze metal	EA	2		
9	TAX @ LOCAL JURISIDICTION PERCENTAGE					LS	1		
12	Freight - Dropped off to OPUD for all aforementioned items above					LS	1		
								SUM	


PO Box 670
Olivehurst, CA 95961
Phone (530) 682-0736


MODEL #100FSS84 OR EQUAL TO - 84"
CONCRETE PICNIC TABLE ROLLING HILLS PARK -
OLIVEHURST PUD

CUSTOMER APPROVAL x_____

SCALE: 1" = 32"

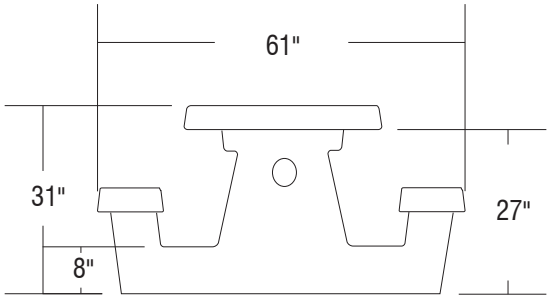

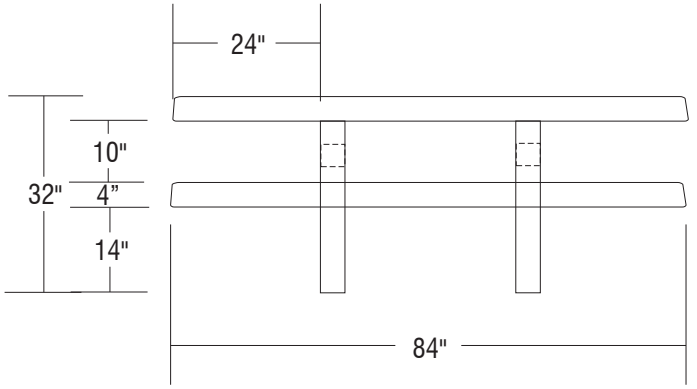

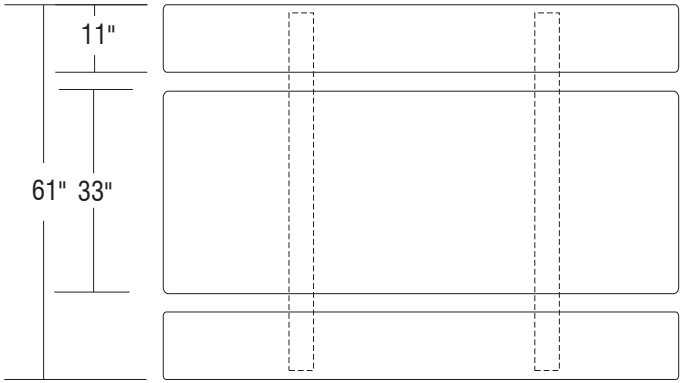

NOTES:
1. Concrete mix design to include a mixture of Portland Cement, water, coarse and fine aggregates, pure mineral oxide coloring agents (when applicable) to yield a minimum compressive strength of 5000 psi.
2. Final product shall be reinforced with #4 and #5 rebar grid.
3. Product is cast in 1-piece with no assembly required.
4. Hairline cracks may develop over time. These are not structural failures, but inherent characteristics of the material itself.
5. Air pockets are a common occurrence in precast products. The frequency and size of air pockets are variable and to be expected, especially on vertical surfaces.
6. Concrete corners and edges will chip if not handled according to guidelines. Patch kits are available but may or may not blend and can be variable.
7. There is a level of care and maintenance associated with your product and is the responsibility of the end user. Choosing the right sealer can help minimize those costs.



* Wheelchair Accessibility available at both ends of table to meet A.D.A. Guidelines


WEIGHT: 2100 LBS
TEXTURE: Smooth
COLOR: ODC Cocoa
SEALER: Standard Acrylic
Graffiti Coating


MODEL #100FSS84LE OR EQUAL TO-
CONCRETE PICNIC TABLE WITH LEFT SIDE WHEELCHAIR ENTRANCE ROLLING HILLS PARK - OLIVEHURST PUD


CUSTOMER APPROVAL x_____

SCALE: 1" = 32" MAN. TOL. +/- 1/4"

DRAWN BY: MNC 10/27/26

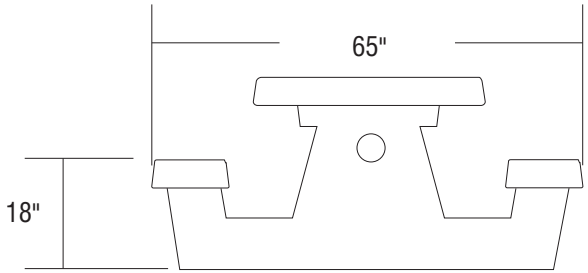

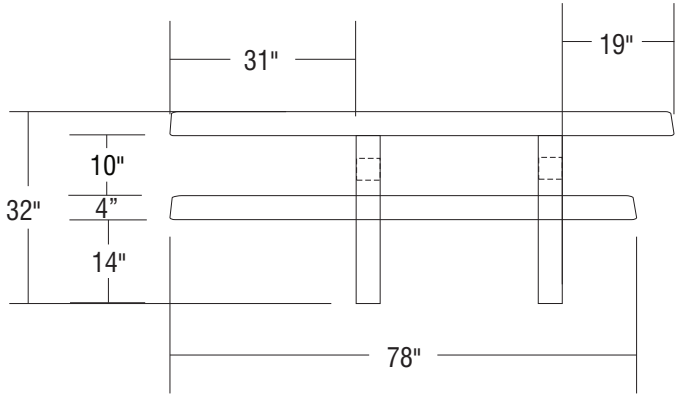

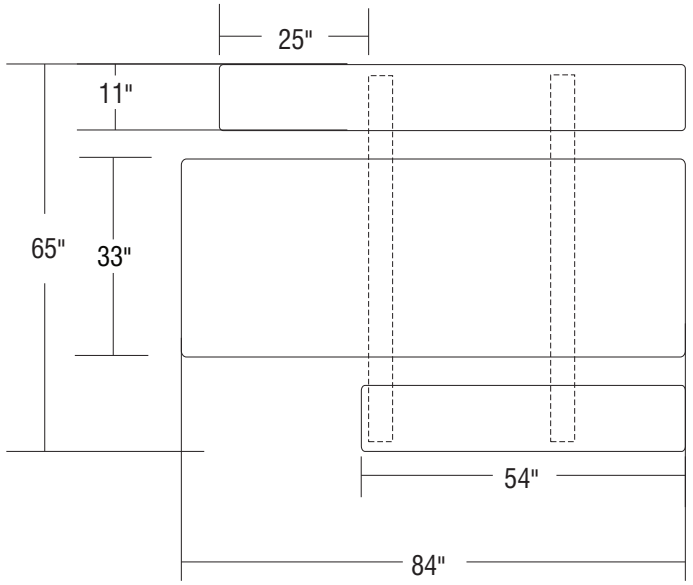


NOTES:
1. Concrete mix design to include a mixture of Portland Cement, water, coarse and fine aggregates, pure mineral oxide coloring agents (when applicable) to yield a minimum compressive strength of 5000 psi.
2. Final product shall be reinforced with #4 and #5 rebar grid.
3. Product is cast in 1-piece with no assembly required.
4. Hairline cracks may develop over time. These are not structural failures, but inherent characteristics of the material itself.
5. Air pockets are a common occurrence in precast products. The frequency and size of air pockets are variable and to be expected, especially on vertical surfaces.
6. Concrete corners and edges will chip if not handled according to guidelines. Patch kits are available but may or may not blend and can be variable.
7. There is a level of care and maintenance associated with your product and is the responsibility of the end user. Choosing the right sealer can help minimize those costs.





* Wheelchair Accessibility available at both ends of table to meet A.D.A. Guidelines

WEIGHT: 2000 LBS
TEXTURE: Smooth
COLOR: ODC Cocoa
SEALER: Standard Acrylic Graffiti Coating

MODEL #100FSS CONCRETE PICNIC TABLE		SCALE: 1” = 32”
	CUSTOMER APPROVAL x_____	DRAWN BY: MNC

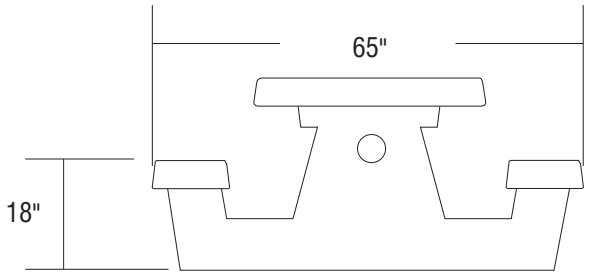

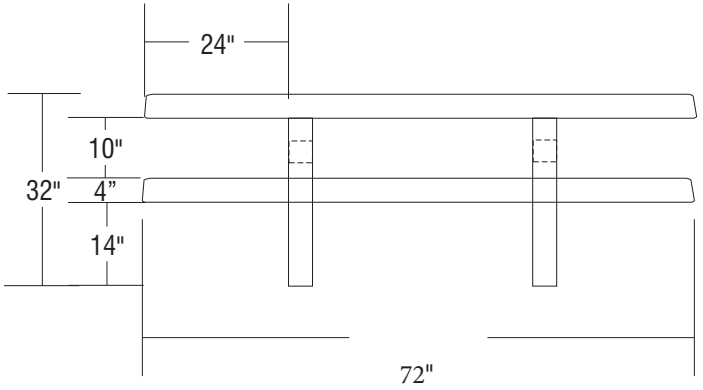

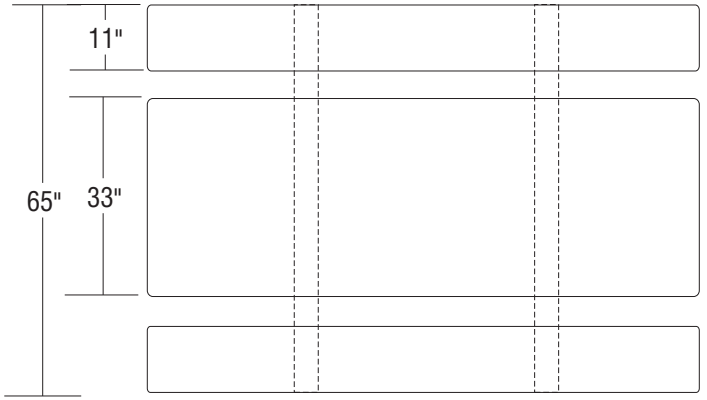

NOTES:
1. Concrete mix design to include a mixture of Portland Cement, water, coarse and fine aggregates, pure mineral oxide coloring agents (when applicable) to yield a minimum compressive strength of 5000 psi.
2. Final product shall be reinforced with #4 and #5 rebar grid.
3. Product is cast in 1-piece with no assembly required.
4. Hairline cracks may develop over time. These are not structural failures, but inherent characteristics of the material itself.
5. Air pockets are a common occurrence in precast products. The frequency and size of air pockets are variable and to be expected, especially on vertical surfaces.
6. Concrete corners and edges will chip if not handled according to guidelines. Patch kits are available but may or may not blend and can be variable.
7. There is a level of care and maintenance associated with your product and is the responsibility of the end user. Choosing the right sealer can help minimize those costs.



* Wheelchair Accessibility available at both ends of table to meet A.D.A. Guidelines

WEIGHT: 2450 LBS
TEXTURE:
COLOR:
SEALER:


MODEL #408B OR EQUAL TO - CONCRETE BENCH WITH BACK, ARMRESTS, (1) PIECE WITH CONTOURED SEAT ROLLING HILLS PARK - OLIVEHURST PUD

CUSTOMER APPROVAL x_____


SCALE: 1" = 24"

DRAWN BY: MNC 10/27/26


FRONT ELEVATION

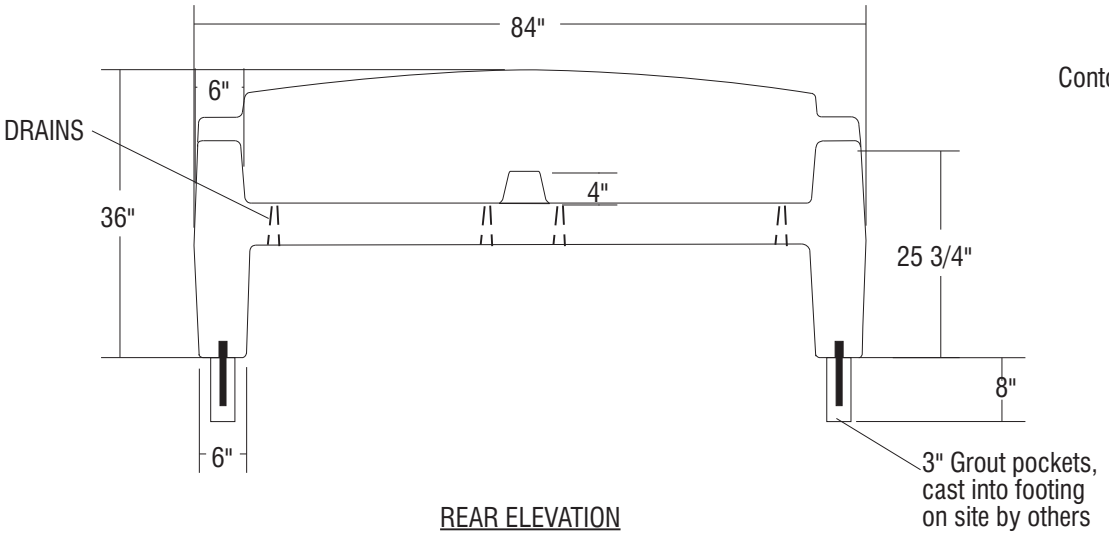

SECTION

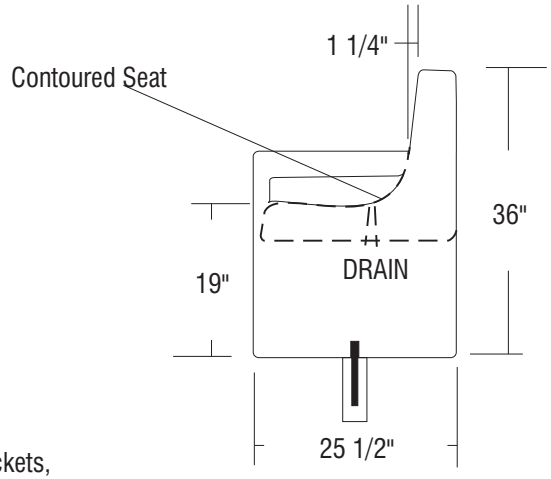

REAR ELEVATION

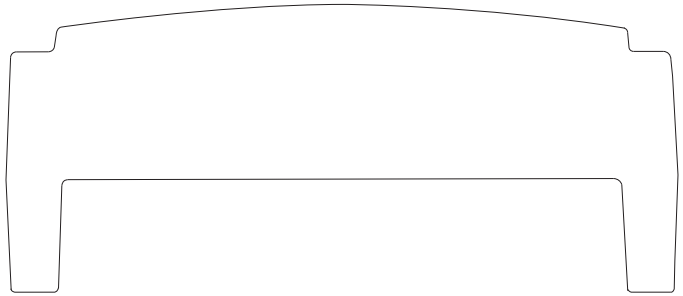


NOTES:
1. Concrete mix design to include a mixture of Portland Cement, water, coarse and fine aggregates, pure mineral oxide coloring agents (when applicable) to yield a minimum compressive strength of 5000 psi.
2. Final product shall be reinforced with #4 and #5 rebar grid.
3. Product is cast in 1-piece with no assembly required.
4. Hairline cracks may develop over time. These are not structural failures, but inherent characteristics of the material itself.
5. Air pockets are a common occurrence in precast products. The frequency and size of air pockets are variable and to be expected, especially on vertical surfaces.
6. Concrete corners and edges will chip if not handled according to guidelines. Patch kits are available but may or may not blend and can be variable.
7. There is a level of care and maintenance associated with your product and is the responsibility of the end user. Choosing the right sealer can help minimize those costs.

BENCH INSTALLATION::
This bench model will have cast in threaded inserts in the bottom of each leg. Bench will be supplied with coilrod for mechanical attachment, as an additional security method.
**Bench requires epoxy applied to cover bottom of entire leg. Epoxy adhesive should be checked periodically to ensure continued adhesion.

*Threaded inserts in legs for mounting dowels (1 per leg).
(2) 3/4" x 8" coilrods provided per bench for mounting.

WEIGHT: 2000 LBS
TEXTURE: Smooth
COLOR: ODC Cocoa
SEALER: Standard Acrylic
Graffiti Coating

BENCH INSTALLATION INSTRUCTIONS
AND CUSTOMER APPROVAL

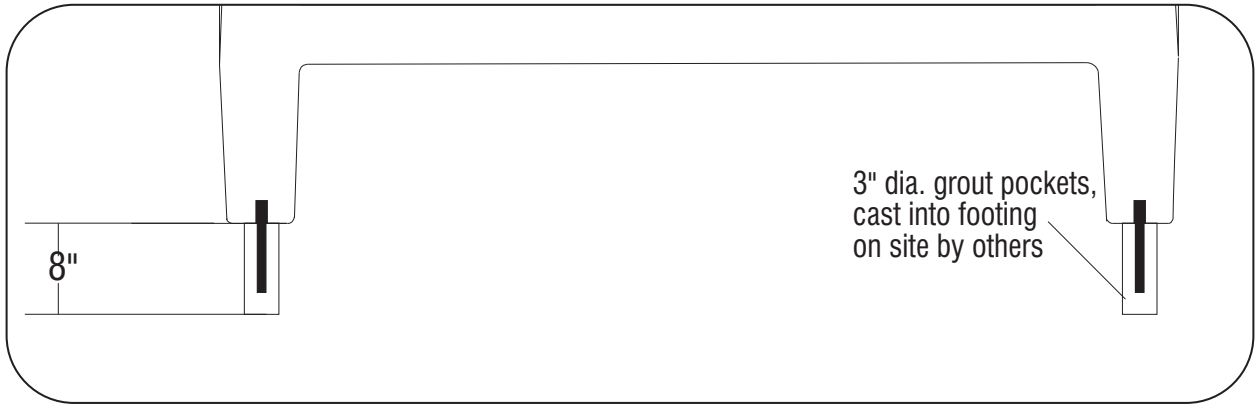

(For illustration purposes only, leg widths and spacing will differ depending on the model#)

INSTRUCTIONS FOR BENCH INSTALLATION WITH COILROD

Most bench models will have threaded inserts in bottom of each leg and coilrod will be supplied. Please reference the spec sheet of the model of bench being purchased for additional information.

1) Pour a concrete footing with 3" diameter grout pockets, per spec sheet. Make sure it is flat and level.
2) While bench is lifted, thread coilrod (shipped with bench), into threaded inserts in bottom of bench.
3) Place bench with coilrods into grout pockets in footing. Do not epoxy yet as a "dry run" to check for proper fit is recommended.
4) If bench installs properly then you can proceed to permanent installation that includes application of mortar/epoxy (not supplied by ODC).
5) Remove bench with coilrods. Mix mortar and fill grout pockets ¾ full with mortar.
6) Apply a thick bead of construction epoxy on the bottom of each leg.
7) Reinstall bench with coilrods into grout pockets located in footing.
8) Use rags/towels to clean up any epoxy that may squeeze out from under the bench as it settles on footing.
9) Epoxy adhesive should be checked periodically to ensure continued adhesion.


The concrete footing/flatwork is the minimum below grade requirement as recommended by Outdoor Creations, Inc. Any additional requirement such as additional height, inset mounting pocket, changes to mounting method for local code requirements, etc. to be the responsibility of the customer.
Outdoor Creations Inc. does NOT supply footings and is not liable for footings done by others.
By signing below, I (the customer), am responsible for footings done on site.

CUSTOMER APPROVAL x_____


OUTDOOR CREATIONS INC.
2270 Barney Street
Anderson, CA 96007
(530) 365-6106
FAX (530) 365-5129

MODEL #506 - WASTE RECEPTACLE WITH SIDE OPENING		SCALE: 1" = 24"
	CUSTOMER APPROVAL x_____	DRAWN BY: MNC

FRONT ELEVATION

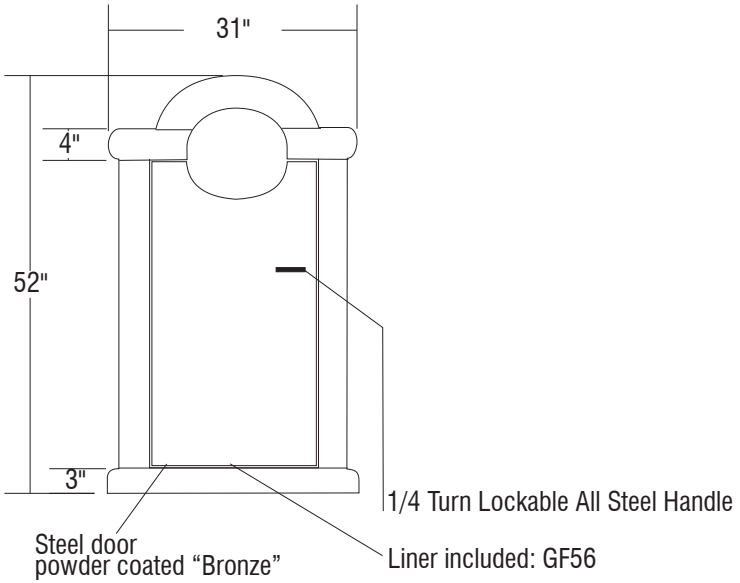

SIDE ELEVATION

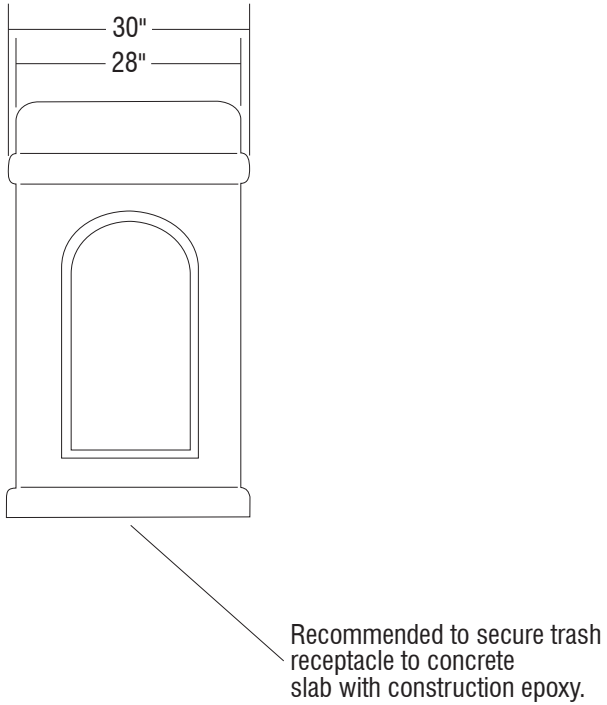

NOTES:
1. Concrete mix design to include a mixture of Portland Cement, water, coarse and fine aggregates, pure mineral oxide coloring agents (when applicable) to yield a minimum compressive strength of 5000 psi.
2. Final product shall be reinforced with #4 and #5 rebar grid.
3. Product is cast in 1-piece with no assembly required.
4. Hairline cracks may develop over time. These are not structural failures, but inherent characteristics of the material itself.
5. Air pockets are a common occurrence in precast products. The frequency and size of air pockets are variable and to be expected, especially on vertical surfaces.
6. Concrete corners and edges will chip if not handled according to guidelines. Patch kits are available but may or may not blend and can be variable.
7. There is a level of care and maintenance associated with your product and is the responsibility of the end user. Choosing the right sealer can help minimize those costs.

WEIGHT: 2000 LBS
TEXTURE:
COLOR:
SEALER:


MODEL #504 WASTE RECEPTACLE WITH SIDE OPENING
ROLLING HILLS PARK - OLIVEHURST PUD

CUSTOMER APPROVAL x_____


SCALE: 1" = 24"

DRAWN BY: MNC 10/27/26

ELEVATION

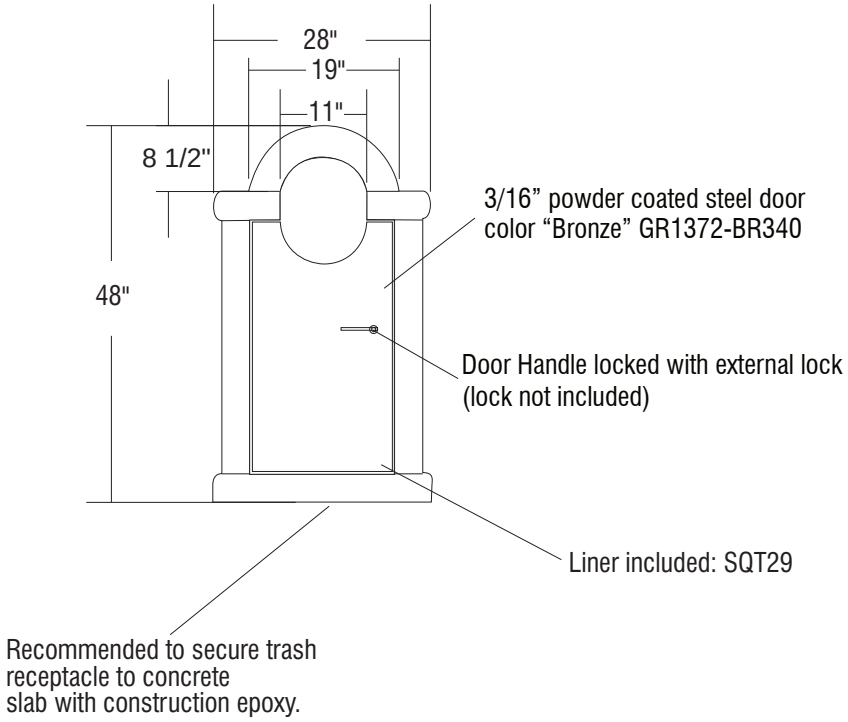

SIDE ELEVATION

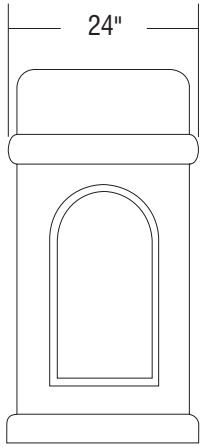

NOTES:
1. Concrete mix design to include a mixture of Portland Cement, water, coarse and fine aggregates, pure mineral oxide coloring agents (when applicable) to yield a minimum compressive strength of 5000 psi.
2. Final product shall be reinforced with #4 and #5 rebar grid.
3. Product is cast in 1-piece with no assembly required.
4. Hairline cracks may develop over time. These are not structural failures, but inherent characteristics of the material itself.
5. Air pockets are a common occurrence in precast products. The frequency and size of air pockets are variable and to be expected, especially on vertical surfaces.
6. Concrete corners and edges will chip if not handled according to guidelines. Patch kits are available but may or may not blend and can be variable.
7. There is a level of care and maintenance associated with your product and is the responsibility of the end user. Choosing the right sealer can help minimize those costs.

WEIGHT: 1300 LBS
TEXTURE: Smooth
COLOR: ODC Cocoa
SEALER: Standard Acrylic
Graffiti Coating